




High Strength Acrylic Mount Tape 2108

Technical Data Sheet **November 2004**

General Description A reinforced acrylic foam tape with high tack and shear strength performance acrylic adhesives. Excellent resistance to solvent, chemical, UV and heat, making the tape bond securely to a very wide range of substrates. Ideal for bonding emblems, nameplates and metal.

Product Construction

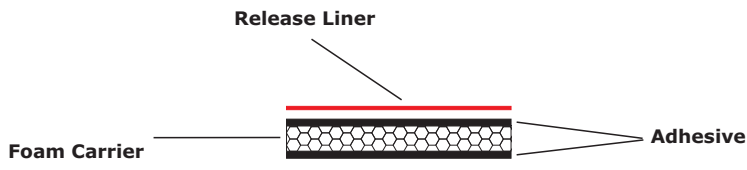

Shelf Life One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

Physical Properties Values shown are typical values not to be used for specification purposes.

Carrier	Acrylic foam base in clear, white or grey
Release Liner	Red HDPE
Adhesive	High Tack Acrylic (Solvent Based)
Thickness	0.5mm and 1.00mm (+/- 0.05mm) Clear only.
Thickness	0.8mm and 1.00mm (+/- 0.05mm) White and Grey.
Width	9mm, 12mm, 19mm and 25mm (+/- 1mm)
Length	10m (+/- 0.1m)

Other lengths and widths available upon request.

Performance properties Values shown are typical values not to be used for specification purposes.

Peel Adhesion	PSTC-3 2.8kgs/25mm
Shear Adhesion	PSTC-7 over 72 hours with 2kg on 25mm x 25mm at 25°C
Tensile Strength	Over 50kgs/25mm x 25mm
Heat Resistance	PSTC-9 over 24 hours with 1kg on 25mm x 25mm at 80°C
Service Temp	-40°C to 170°C
Application Temp	-10°C to 150°C

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's method of application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's method of application.

Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.

