


PRODUCT DESCRIPTION

JTAPE Cloth Tape is a polythene cloth laminate self adhesive tape with a waterproof high tack adhesive, for use on automotive body panels to prevent damage during the sanding process. Specially formulated to allow clean removal after use not leaving any adhesive residue. Temperature resistant up to 80°C for one hour. Available in 4 different colours: Black (2203), Silver (2202), Red (2201) & White (2200). Various sizes available on request.

PRODUCT CONSTRUCTION

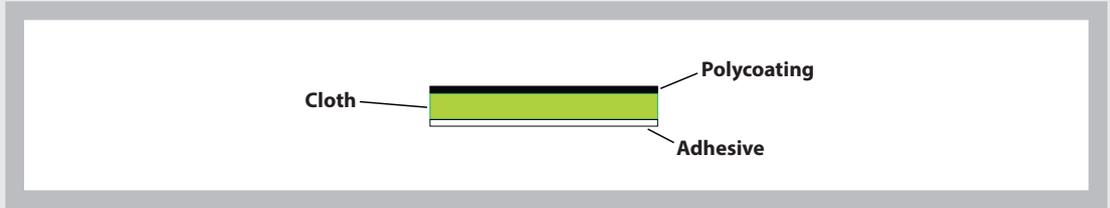

SHELF LIFE

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and not to be used for specification purposes.

Backing	Polycoated cloth
Adhesive	Rubber
Thickness	0.3mm (+/-0.1mm)
Width	50mm (+/- 2mm)
Length	50m (+/- 0.5m)
Elongation	15%

PERFORMANCE PROPERTIES

Values shown are typical values and not to be used for specification purposes.

Peel Adhesion	1.1	(kg/25mm)
Rewinding Force	2	(kg/50mm)
Tensile Strength	14	(kg/25mm)
Holding Power	1 hour	(25mm x 25mm / 40°C)
Ball tack	10	(cm/ball no. 20)
Temperature Resistance	-35 / up to +80	1 hr/°C

JTAPE LIMITED

Hulley Road, Macclesfield, Cheshire, SK10 2SF, United Kingdom

Tel: +44 (0)1625 618185 Fax: +44 (0)8701 207748

www.jtape.com Email: info@jtape.com

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application.

Limitation of Remedies and Liability: If the JTAPE product is proved to be defective. THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.