

# WHEEL REPAIR MASK

A flexible solution for the masking of tyres during the re-spraying of passenger and commercial vehicle rims up to 26 inches in diameter.

PART NO:	SIZE:	UNITS:
1095.1417	170cm x 170cm	20




## FEATURES

*Flexible solution for the masking of tyres during the re-spraying of wheels*

- Elastic centre piece
- Temperature resistant
- Maximum inner diameter: 26"

## BENEFITS

- Paint absorbent
- Flexible for all sizes of wheel
- Saves time & material compared to traditional processes
- Simple & easy to use

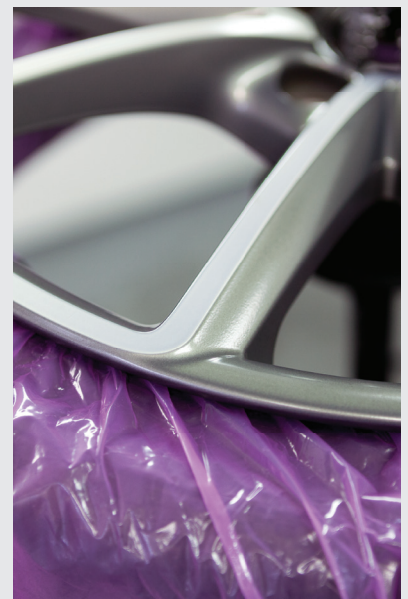

Wheel Repair Mask

## HOW TO USE THIS PRODUCT:



1. Remove wheel from the vehicle and deflate the tyre.



2. Clean the inner rim ensuring it's free from dirt and grease.



3. Apply the product by placing the elasticated band around the rim, ensuring the treated side of the film is facing upwards.



4. Carefully flip over so the wheel is facing the ground, draw the corners of the product together and tape down.



5. To complete the masking process, flip the wheel over, checking that the elasticated band is still creating a seal and then paint.