

# PAINT CONTROL TAPE

## TECHNICAL DATA SHEET 1190


V3.01/23

### PRODUCT DESCRIPTION

JTAPE Paint Control Tape consists of a chequer-printed, polypropylene backing and a strong acrylic-based adhesive. Paint Control Tape enables the optimisation of paint thickness and coverage due to its chequered pattern. The adhesive offers excellent grab and is specially formulated to ensure clean removal after use, without leaving any adhesive residue.

### PRODUCT CONSTRUCTION

Carrier  
Adhesive

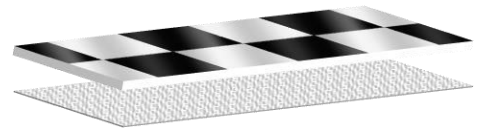

### SHELF LIFE

12 months from date of receipt by customer when stored at 25°C ±5°C (77°F ±9°F) and 60% relative humidity.

### PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	Polypropylene
Adhesive	Water-based, acrylic
Colour	White & Black chequered
Thickness	49µm / 0.049mm (±10%)
Width	24mm (±5%) other widths available on request.
Length	30m (±2%).

### PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Peel Adhesion	5.9N/25mm (±10%) [ASTM-D1000]
Tensile Strength	44N/cm
Application Temperature	Recommended: 15°C (59°F) to 25°C (77°F)

Tel: +44 (0)1625 618185 | [www.jtape.com](http://www.jtape.com) | [info@jtape.com](mailto:info@jtape.com)

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.