

ALUMINIUM TAPE


TECHNICAL DATA SHEET **2107**

V3. 06/23

PRODUCT DESCRIPTION

JTAPE Aluminium Tape uses a 30 micron aluminium foil, coated with a high performance acrylic adhesive, supplied on a calendered paper release liner. Suitable for use in demanding environments, offering good UV resistance, excellent moisture resistance, high and low temperature resistance and rated as class "0" fire resistant to BS476 parts 6 & 7. Use for ventilation systems, piping, ducting, sealing and bonding of insulation joints and underfloor heating.

PRODUCT CONSTRUCTION

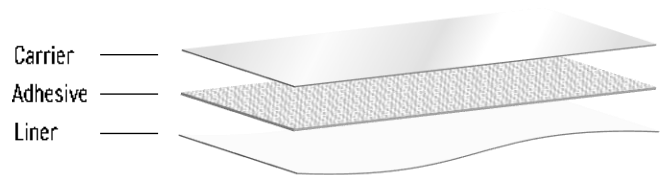

SHELF LIFE

12 months from date of receipt by customer when stored at 25°C ±5°C (77°F ±9°F) and 60% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	Aluminium Foil
Adhesive	Acrylic
Colour	Metallic/Silver
Thickness	55µm / 0.055mm (including adhesive); 140µm / 0.140mm Total thickness including liner
Width	48mm (±5%)
Length	45m (±0.2m).

PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Peel Adhesion	20.0N/25mm (±10%) [ASTM-D1000]
Elongation at Break	3%
Tensile Strength	15N/cm
Temperature Resistance	-40°C to +150°C (-40°F to 300°F) Short-term
Application temperature	5°C to 25°C (40°F to 75°F)
UV Resistance	Good
Moisture Vapour Permeability	<1g/m² 25h at 40°C and 90% RH
Fire Rating	BS476 pt 6&7 / UL723 Class '0'

Tel: +44 (0)1625 618185 | www.jtape.com | info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective. THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.