


### PRODUCT DESCRIPTION

**JTAPE** Grey Double Sided Acrylic Tape is a reinforced acrylic foam tape with high tack and shear strength performance acrylic adhesive. The product has excellent adhesion to a wide range of substrates including plastics & metals. Ideal for bonding emblems, nameplates, plastic panels and metals.

### PRODUCT CONSTRUCTION

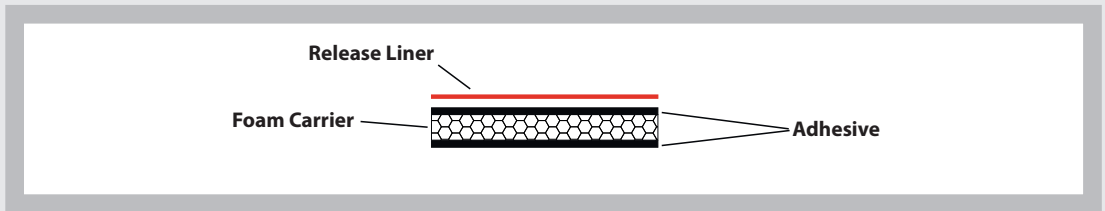

### SHELF LIFE

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

### PHYSICAL PROPERTIES

Values shown are typical values and not to be used for specification purposes.

<b>Carrier</b>	Acrylic Foam Base, Grey
<b>Liner</b>	Red PE Film
<b>Adhesive</b>	High Tack Acrylic (Solvent Based)
<b>Thickness</b>	1.1mm (+/- 0.05mm)
<b>Width</b>	9mm, 12mm, 19mm and 25mm (+/- 1mm)
<b>Length</b>	10m (+/- 0.1m)
Other sizes available upon request.	

### PERFORMANCE PROPERTIES

Values shown are typical values and not to be used for specification purposes.

<b>Peel Adhesion</b>	PSTC-3 2.8kgs/25mm
<b>Shear Adhesion</b>	PSTC-7 over 72 hours with 2kg on 25mm x 25mm at 25°C
<b>Tensile Strength</b>	Over 50kgs/25mm x 25mm
<b>Heat Resistance</b>	PSTC-9 over 24 hours with 1kg on 25mm x 25mm at 80°C
<b>Service Temperature</b>	-40°C to 170°C
<b>Application Temperature</b>	-10°C to 150°C

### JTAPE LIMITED

Hulley Road, Macclesfield, Cheshire, SK10 2SF, United Kingdom

Tel: +44 (0)1625 618185 Fax: +44 (0)8701 207748

www.jtape.com Email: info@jtape.com

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application.

Limitation of Remedies and Liability: If the JTAPE product is proved to be defective. THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.