


HAZARD TAPE

PRODUCT INFORMATION SHEET **PART NO. 1126.4833**

PRODUCT

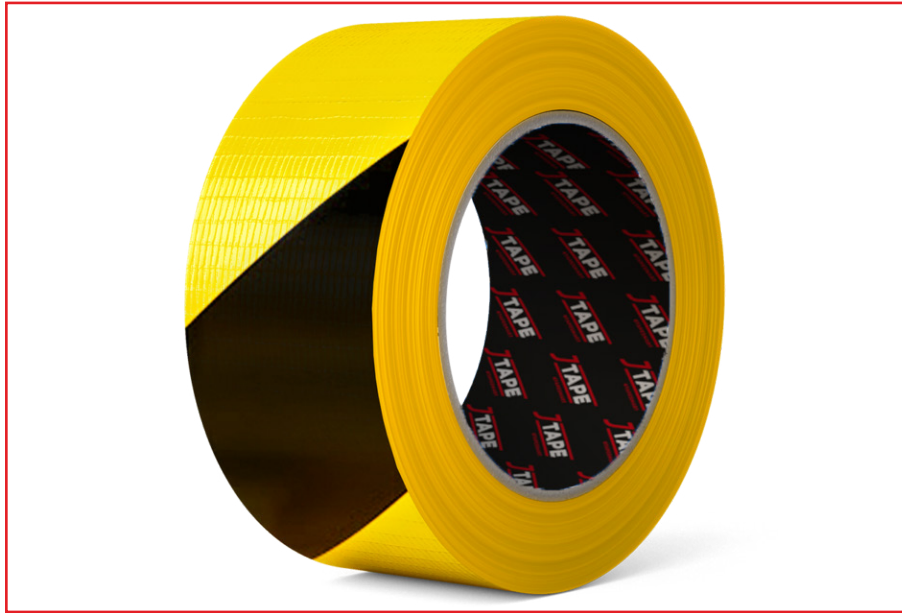

DESCRIPTION

JTAPE Hazard Tape, PE laminated synthetic cloth duct tape, coated with a semi-permanent synthetic rubber – resin solvent free adhesive. Its adhesive formulation resists at low temperature with excellent bonding to multiple rough and smooth surfaces. Ideal for bonding, sealing, jointing, repairing and warning-marking operations. This tough hazard warning lined adhesive tape is characterised by good abrasion resistance and high adhesion. For clean removal, long-term UV exposure is not recommended. JTAPE Hazard Tapes are used to identify and seal off hazard and safety areas and as marking systems to keep safe distances between people.

FEATURES AND BENEFITS

- ✓ Easy tear
- ✓ Weather resistant
- ✓ Waterproof
- ✓ Good abrasion resistance
- ✓ Excellent conformability
- ✓ Excellent adhesion on smooth and rough surfaces

PHYSICAL PROPERTIES

Values shown are typical values and not to be used for specification purposes.

Size	48mm x 33m
Quantity per case	20 units
Backing material	PE Laminated synthetic cloth
Type of adhesive	Synthetic Rubber Resin – solvent free

TECHNICAL DATA

Values shown are typical values and not to be used for specification purposes.

	Metric	Test Method
Total weight	153 g/m ²	ISO 536
Total thickness	165 µm	Internal
MD tensile strength	34 N/cm	AFERA 5004/PSTC 131
MD elongation at break	20 %	AFERA 5004/PSTC 131
Adhesion to steel plate	8.0 N/cm	AFERA 5001/PSTC 101
Service Temperature	-10°C / 60°C	

Tel: +44 (0)1625 618185 www.jtape.com info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART