


# HAZARD TAPE

PRODUCT INFORMATION SHEET **PART NO. 1126.4833**

## PRODUCT

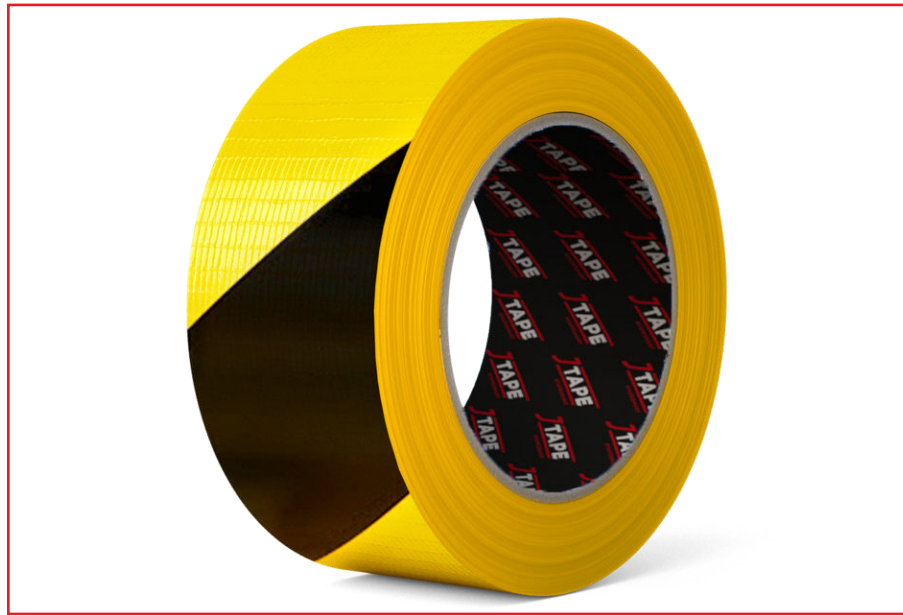

## DESCRIPTION

JTAPE Hazard Tape, PE laminated synthetic cloth duct tape, coated with a semi-permanent synthetic rubber – resin solvent free adhesive. Its adhesive formulation resists at low temperature with excellent bonding to multiple rough and smooth surfaces. Ideal for bonding, sealing, jointing, repairing and warning-marking operations. This tough hazard warning lined adhesive tape is characterised by good abrasion resistance and high adhesion. For clean removal, long-term UV exposure is not recommended. JTAPE Hazard Tapes are used to identify and seal off hazard and safety areas and as marking systems to keep safe distances between people.

## FEATURES AND BENEFITS

- ✓ Easy tear
- ✓ Weather resistant
- ✓ Waterproof
- ✓ Good abrasion resistance
- ✓ Excellent conformability
- ✓ Excellent adhesion on smooth and rough surfaces

## PHYSICAL PROPERTIES

Values shown are typical values and not to be used for specification purposes.

Size	48mm x 33m
Quantity per case	20 units
Backing material	PE Laminated synthetic cloth
Type of adhesive	Synthetic Rubber Resin – solvent free

## TECHNICAL DATA

Values shown are typical values and not to be used for specification purposes.

	Metric	Test Method
Total weight	153 g/m <sup>2</sup>	ISO 536
Total thickness	165 µm	Internal
MD tensile strength	34 N/cm	AFERA 5004/PSTC 131
MD elongation at break	20 %	AFERA 5004/PSTC 131
Adhesion to steel plate	8.0 N/cm	AFERA 5001/PSTC 101
Service Temperature	-10°C / 60°C	

Tel: +44 (0)1625 618185 [www.jtape.com](http://www.jtape.com) [info@jtape.com](mailto:info@jtape.com)

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART