

GENERAL PURPOSE CLOTH PROTECTION TAPE


TECHNICAL DATA SHEET **2209**

V4.01/23

PRODUCT DESCRIPTION

General Purpose Cloth Protection Tape is a great addition to any toolbox for most general applications from light duty sealing, bundling, marking and temporary repairs on non-critical applications. Made of a synthetic rubber adhesive which allows it to adhere to a variety of surfaces including metal, glass, wood and plastics. This general purpose, polyethylene backed duct-tape ensures moisture resistance for reliable performance in moist or humid environments. Duct tapes offer a high level of adhesion and are great for use where longer-term fixes are required, with easy to tear properties.

PRODUCT CONSTRUCTION

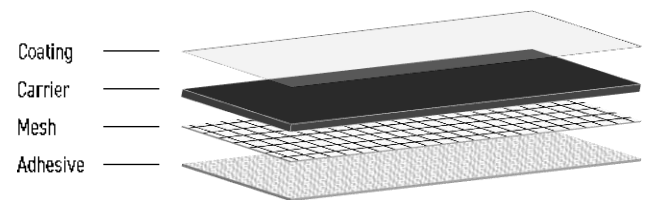

SHELF LIFE

12 months from date of receipt by customer when stored at max. 21°C (max. 70°F) and 50% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	Release-coated Polyethylene film with synthetic cloth mesh
Adhesive	Synthetic Rubber/Resins
Colour	Black
Thickness	140µm / 0.140mm (±10%)
Width	50mm (±5%) other widths available on request.
Length	50m (±2%) other lengths available on request.

PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Peel Adhesion	14N/25mm (±10%) [ASTM-D1000]
Tensile Strength	30N/cm (±5%)
Service Temperature	-5 to +60°C (23 to 140°F)

Tel: +44 (0)1625 618185 | www.jtape.com | info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective. THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.