

# TACKY BOOTH PROTECTION FILM


## TECHNICAL DATA SHEET **2215**

V1.12/23

### PRODUCT DESCRIPTION

JTAPE Tacky Booth Protection Film is specifically designed for protecting spray booth surfaces. It consists of an exposed adhesive surface that is used for application to clean spray booth surfaces and allows the film to be removable. On the other side (protected by a double-sided liner when on roll) is a specially formulated adhesive designed to capture over-spray and reduce static electricity in the spray booth environment. Heat resistant up to 80°C

### PRODUCT CONSTRUCTION

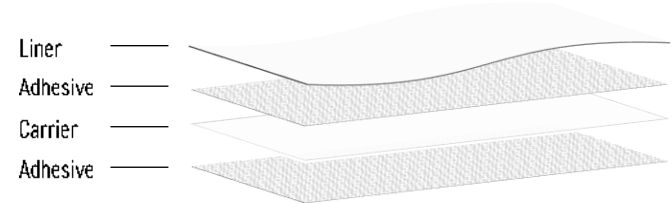

### SHELF LIFE

12 months from date of receipt by customer when stored at 20°C ±5°C (68°F ±9°F) and 60% relative humidity.

### PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Liner	Dual-sided Glassine release liner
Adhesive	Water-based acrylic (protected by liner when unrolled / exposed surface when liner removed)
Carrier	Polyester
Adhesive	Solvent-based acrylic (exposed when unrolled / applied to wall/surface of booth when used) - removable
Colour	White
Thickness	55µm / 0.055mm (±5%) + 70µm / 0.070mm release liner
Width	1000mm (±5%). Other widths <1000mm available on request.
Length	65m (±2%). Other lengths available on request.

### PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Temperature Resistance	Up to 80°C (175°F)
Durability	1000 hours of bake time. Should be replaced after 3 months (dependent on use)

Tel: +44 (0)1625 618185 | [www.jtape.com](http://www.jtape.com) | [info@jtape.com](mailto:info@jtape.com)

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

**#TAPESMART**

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective. THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.