

# WHEEL REPAIR MASK


## TECHNICAL DATA SHEET 1095

V3 [02/25]

### PRODUCT DESCRIPTION

JTAPE Wheel Repair Mask is a flexible solution for the masking of tyres during the spraying of wheels. The product consists of a 25 micron HDPE film, corona-treated to hold overspray. It has an elasticated inner circular hole to allow the Wheel Repair Mask to expand from 280mm to 660mm (11" to 26") in diameter to ensure grip between the tyre and wheel. Temperature resistant to 100°C for baking cycles.

### PRODUCT CONSTRUCTION

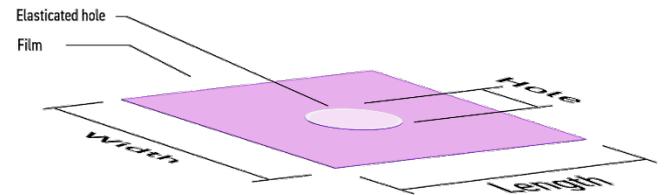

### SHELF LIFE

12 months from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

### PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	Corona treated HDPE Film
Adhesive	N/A - Non-Adhesive Product
Colour	Translucent pink/purple
Thickness	25µm / 0.025mm (±0.10%)
Width	1700mm (±5%)
Length	1700mm (±5%)
Elasticated Hole	Ø280mm to Ø660mm (Ø11 inches to Ø26 inches)

### PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Temperature Resistance	100°C (212°F) for ≤30mins
------------------------	---------------------------

Tel: +44 (0)1625 618185 | [www.jtape.com](http://www.jtape.com) | [info@jtape.com](mailto:info@jtape.com)

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.