

DOOR SKIN REPLACEMENT FOAM

TECHNICAL DATA SHEET **2204**

V3 [02/25]

PRODUCT DESCRIPTION

JTAPE Door Skin Replacement Foam is a polyethylene foam, coated with a PET metallised film and an acrylic adhesive. It is supplied on a release liner which is printed with a grid-pattern to assist with sizing and cutting of intricate shapes. The product has a good working temperature range and excellent adhesion to a wide variety of substrates including plastics & metals; ideal for replacing inner door membranes during vehicle repairs.


PRODUCT CONSTRUCTION

Liner

Adhesive

Foil

Foam

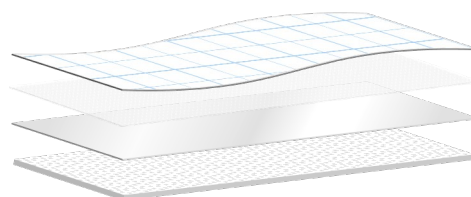

SHELF LIFE

12 months from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	Polyethylene Foam
Adhesive	Acrylic
Colour	White/Metallic
Thickness	1.50mm (±10%) + Liner
Liner	90µm (0.09mm) White Coated-Paper, printed with a grid
Width	600mm (±5%).
Length	10m (±5%).

PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Peel Adhesion	5.3N/25mm
Elongation at Break	>115%
Tensile Strength	25N/cm
Temperature Resistance	60°C (140°F)

Tel: +44 (0)1625 618185 | www.jtape.com | info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.