

NUMBER PLATE PADS

TECHNICAL DATA SHEET 4000.8525

V2 [02/25]


PRODUCT DESCRIPTION

JTAPE Number plate Pads are designed to allow fixing of a numberplate to a vehicle without the need for tools or screws. The product is constructed of a PE double-sided pad, with a liner applied to each side to make the process quick and easy. The Number Plate Pads offer good, long-lasting resistance to weathering including moisture and UV.

Available in packs of 3 or 6, or rolls of 1000

PRODUCT CONSTRUCTION

Liner
Adhesive
Carrier
Adhesive
Liner

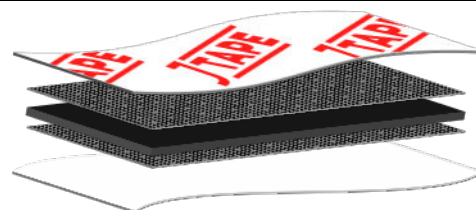

SHELF LIFE

12 months from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	Polyethylene Foam
Adhesive	Solvent-Based Acrylic
Colour	Black (with Liners)
Thickness	Total thickness 1.00mm (±10%) / Tape thickness 0.80mm + Adhesive (±10%)
Printed Liner	80µm (0.080mm) ±10% White CCK silicone-coated with printed logo
Plain Liner	80µm (0.080mm) ±10% White CCK silicone-coated
Width	25mm (±5%)
Length	85mm (±5%)

PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Peel Adhesion	30N/25mm
Elongation at Break	>180%
Tensile Strength	6N/cm
Temperature Range	-20°C to 80°C (-4°F to 176°F)

Tel: +44 (0)1625 618185 | www.jtape.com | info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.