

HIGH TEMPERATURE POLYESTER DISCS

TECHNICAL DATA SHEET 4009


V4 [02/25]

PRODUCT DESCRIPTION

Green High Temperature Polyester Film Discs are resistant to temperatures up to 220°C. They are specifically designed to cover the rear hub of alloy wheels and to provide a reliable solution while coating, baking and treating wheels during the refurbishment process.

Masking Discs are also available in a High Temperature Crepe 160°C version – Product Ref 4003.

PRODUCT CONSTRUCTION

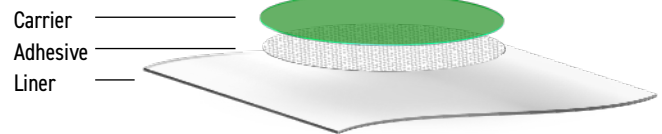

SHELF LIFE

12 months from date of receipt by customer when stored at 20°C ±5°C (68°F ±9°F) and 65% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	Polyester
Adhesive	Silicone-based
Colour	Green (Translucent)
Thickness	80µm / 0.080mm (±10%)
Liner	75µm Transparent PET
Diameter Ø	Ø155mm or Ø165mm (±2%). Other sizes available on request
Roll	250 discs per roll. Other quantities available on request

PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Peel Adhesion	8N/25mm
Elongation at Break	≥100%
Temperature Resistance	Up to 220°C (428°F) for ≥30 mins.

Tel: +44 (0)1625 618185 | www.jtape.com | info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.