

ADVANCED FOAM MASKING TAPE


TECHNICAL DATA SHEET 1011

V4 [11/25]

PRODUCT DESCRIPTION

Advanced Foam Masking Tape is designed for masking door apertures to prevent the ingress of paint during the automotive refinish process. Features offset adhesive to give increased flexibility and adjustability during use.

PRODUCT CONSTRUCTION

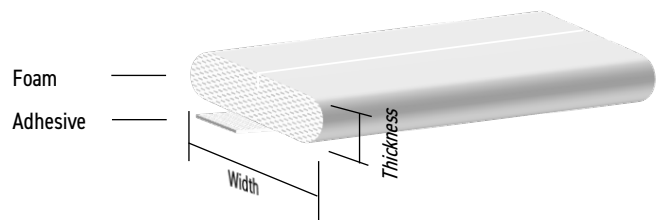

SHELF LIFE

12 months from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

	1011.2050	1011.2535
Material	Foam	Foam
Adhesive	Rubber-based	Rubber-based
Colour	White	White
Thickness	9mm (±10%)	9mm (±10%)
Width	20mm (±15%)	25mm (±15%)
Length	50m (±5%)	35m (±5%)

PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Peel Adhesion	2N (≈6N/25mm)	2N (≈6N/25mm)	[ASTM D3330-F]
Elongation at Break	≥120%	≥120%	[ISO 1798]
Tensile Strength	≥100kPa	≥100kPa	[ISO 1798]
Density	33kg/m³	33kg/m³	[ISO 845]
UV Resistance	Limited	Limited	
Temperature Resistance	≤85°C (185°F) for ≤1 hour	≤85°C (185°F) for ≤1 hour	

Tel: +44 (0)1625 618185 | www.jtape.com | info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The user is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for the user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. **Limitation of Remedies and Liability:** If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.