

MULTI-LAYER BOOTH PROTECTION FILM

TECHNICAL DATA SHEET **2216**


V2 (07/25)

PRODUCT DESCRIPTION

JTAPE Layered Spray Booth Protection Film is a polypropylene multi-layer film specifically designed for protecting spray booth surfaces. Each of the 4 layers consists of an exposed tacky surface, designed to capture over-spray in the spray booth environment; on the underside is an acrylic-based adhesive surface that is used for application to clean spray booth surfaces and allows the film to be removable. Heat resistant up to 80°C

PRODUCT CONSTRUCTION

Liner
 Adhesive
 Carrier
 Adhesive
 Carrier
 Adhesive
 Carrier
 Adhesive
 Carrier
 Adhesive

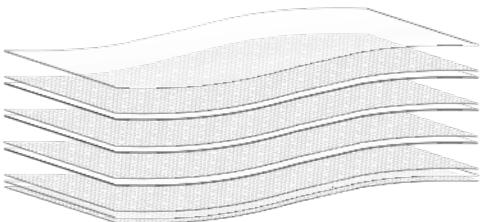

SHELF LIFE

12 months from date of receipt by customer when stored at 20°C (68°F) and 60% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	Polypropylene
Adhesive	Acrylic-based
Colour	White
Thickness	110µm / 0.110mm (±5%)
Width	770mm (±5%). Other widths <770mm available on request.
Length	80m (±2%). Other lengths available on request.

PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Elongation at Break	200%
Tensile Strength	26N/cm
Temperature Resistance	Up to 80°C (176°F)

Tel: +44 (0)1625 618185 | www.jtape.com | info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The user is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for the user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.