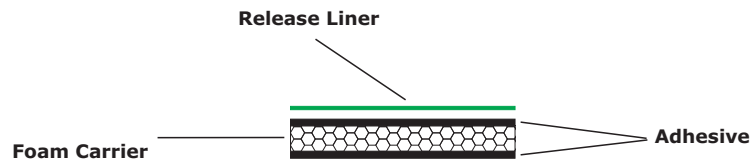


General Description

High tack permanent adhesive with excellent ageing and weather resistant properties for automotive emblems, decals and mouldings, mirror fixings. Good resistance to solvents, chemicals, UV and heat.

Product Construction**Shelf Life**

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

Physical Properties

Values shown are typical values not to be used for specification purposes.

Carrier High Performance PE Foam (96kg/m³) Black

Liner Green Polyolefin

Adhesive Acrylic (Solvent Based)

Thickness 0.8mm (+/- 0.05mm)

Width 9mm, 12mm, 19mm and 25mm (+/- 1mm)

Length 10m (+/- 0.1m)

Other lengths and widths available upon request.

Performance properties

Values shown are typical values not to be used for specification purposes.

Peel Adhesion PSTC-3 1.8kg/25mm

Shear Strength PSTC-7 over 24 hours with 2kg on 25mm x 25mm at 23°C

Tensile Strength Over 45kgs/25mm x 25mm

Heat Resistance PSTC-9 over 24 hours with 0.5kg on 25mm x 25mm at 80°C

Tack J. Dow Number 20

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's method of application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's method of application.

Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.