


**PRODUCT DESCRIPTION**

**JTAPE** No Edge Blending Tape is a combination of a flexible foam substrate combined with a crepe masking tape with a rubber based pressure sensitive adhesive. The product is designed for the masking of panel edges and swage lines to blend from old paintwork to new. Suitable for infra-red.

**PRODUCT CONSTRUCTION**

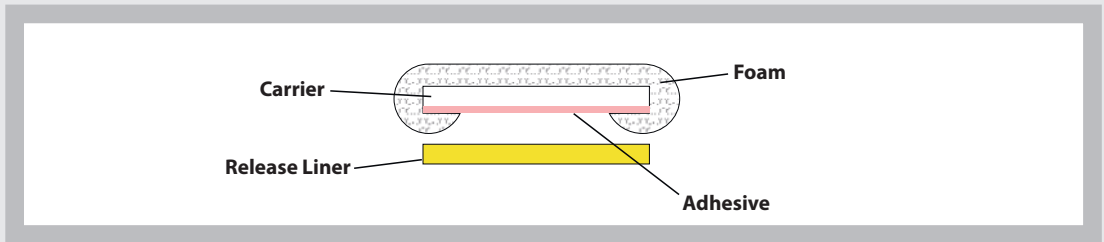

**SHELF LIFE**

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

**PHYSICAL PROPERTIES**

Values shown are typical values and not to be used for specification purposes.

|                  |  |  |
|------------------|--|--|
| <b>Carrier</b>   | Impregnated Crepe Paper (Medium Crepe) / Polyurethane Foam |  |
| <b>Colour</b>    | White  |  |
| <b>Adhesive</b>  | Rubber   |  |
| <b>Thickness</b> | 3mm  |  |
| <b>Width</b>     | 20mm (+/- 1mm)   |  |
| <b>Length</b>    | 5m (+/- 0.1m)  |  |

**PERFORMANCE PROPERTIES**

Values shown are typical values and not to be used for specification purposes.

|                            |            |   |
|----------------------------|------------|---|
| <b>Tensile Strength</b>    | >87.5 N/cm | AFERA 5004                                  |
| <b>Elongation at Break</b> | >9 %       | AFERA 5004                                  |
| <b>Heat Resistance</b>     | 163°C      | 30 - 80 minutes on cooling after bake cycle |

**JTAPE LIMITED**

Hulley Road, Macclesfield, Cheshire, SK10 2SF, United Kingdom  
 Tel: +44 (0)1625 618185 Fax: +44 (0)8701 207748  
 www.jtape.com Email: info@jtape.com

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application.

Limitation of Remedies and Liability: If the JTAPE product is proved to be defective. THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.