


Product Description

JTAPE Refit Tape is a permanent carrier free transfer adhesive with an instant, aggressive bond even on difficult to stick surfaces. With good humidity resistance, the acrylic based adhesive tape also performs well under UV light and chemical resistance.

Product Construction

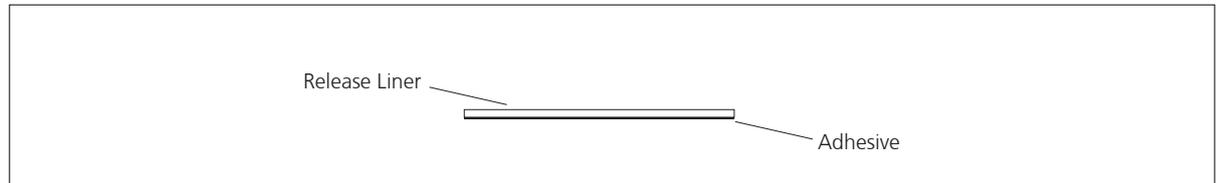

Shelf Life

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

Physical Properties

Values shown are typical values and not to be used for specification purposes.

Liner	Double sided silicone release paper
Adhesive	Acrylic
Colour	White
Liner Thickness	75 micron
Adhesive Thickness	50 micron
Total Thickness	125 micron
Width	12mm, 25mm (+/- 2mm)
Length	10m (+/- 0.5m)

Performance Properties

Values shown are typical values and not to be used for specification purposes.

Peel Adhesion	900 N/M	PSTC 101	24hr
Shear Adhesion	50 hours	PSTC 107	1kg; 25mm x 25mm
Service temperature range	-40°C to 140°C		
Application temperature range	5°C to 50°C		

IMPORTANT NOTICE TO PURCHASER

JTAPE makes no warranties, express or implied, but not limited to, any implied warranty of merchantability or fitness for a particular purpose. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluates the JTAPE automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application.

LIMITATION OF REMEDIES AND LIABILITY

If the JTAPE product is proved to be defective. The exclusive remedy, at JTAPE's option, shall be to refund the purchase price of or to repair or replace the defective JTAPE product. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.