

BLACK & YELLOW CLOTH HAZARD TAPE


TECHNICAL DATA SHEET 1126

V1 (01/25)

PRODUCT DESCRIPTION

JTAPE Black/Yellow Cloth Hazard tape consists of a PE substrate laminated with a synthetic mesh-cloth and a solvent-free synthetic rubber-based adhesive. The product performs well in diverse temperatures from -10°C to 60°C; long-term exposure to UV is not recommended if clean removal is required. Offers good abrasion resistance and excellent adhesion to smooth and rough surfaces and is suitable for jointing, repairs and warning-marking.

PRODUCT CONSTRUCTION

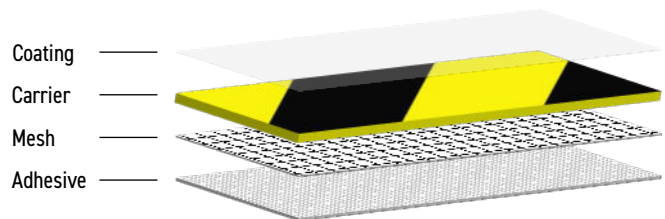

SHELF LIFE

12 months from date of receipt by customer when stored at 20°C ±5°C (68°F ±9°F) and maximum 50% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	Release-coated Polyethylene film with synthetic cloth mesh
Adhesive	Synthetic Rubber/Resins
Colour	Black/Yellow
Total Thickness	165µm / 0.165mm (±10%)
Width	48mm (±5%)
Length	33m (±2%)

PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Peel Adhesion	20N/25mm	[PSTC 101]
Elongation at Break	20%	[PTSC 131]
Tensile Strength	34N/cm	[PTSC 131]
Temperature Range	-10°C to 60°C (14°F to 140°F)	

Tel: +44 (0)1625 618185 | www.jtape.com | info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.